

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H


H

I

I

J

J

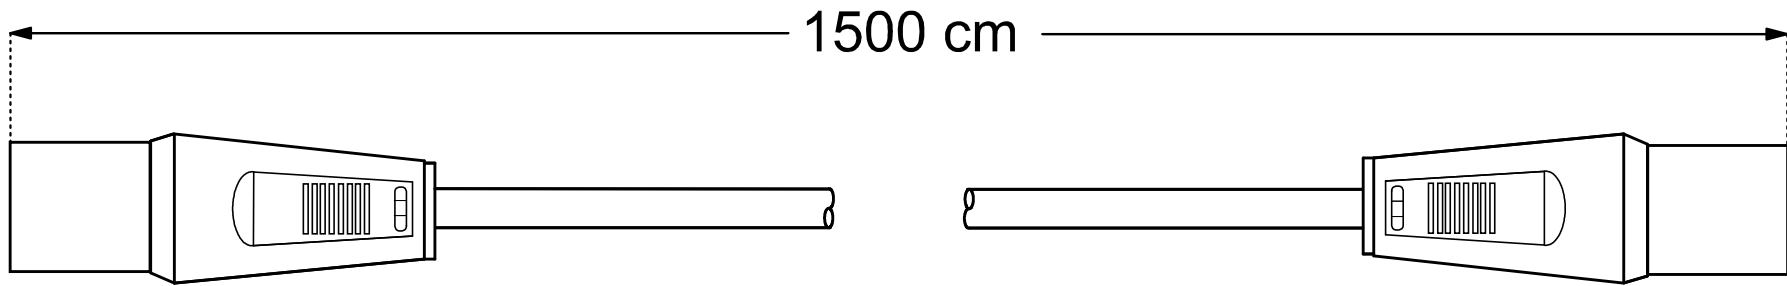

- Koaxial Anschluss Kabel; weiß
 - Koaxialstecker --- Koaxialkupplung
 - doppelt geschirmtes Koaxialkabel (Al Folienschirmung + Geflecht)
 - Impedanz 75 Ohm
 - 32er Geflecht
 - Innenleiter: 0,5 mm CCS
 - Aussendurchmesser: 5,0 mm
 - Ausführung: 3C-2V
 - RoHS-konform
- coaxial cable; 15.0 m; white;bulk
 - coaxial plug --- coaxial jack
 - double shielded coaxial cable (Al foil screening + net)
 - impedance 75 ohm
 - 32 braiding
 - inner conductor: 0.5mm CCS
 - outer diameter: 5.0 mm
 - impedance 75 ohm
 - construction: 3C-2V
 - RoHS-compliant

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	05.02.2007	li	AK 1500 11515 wentronic ELECTRONIC COMPONENTS	
07.05.2009	li	gepr.:	05.02.2007	li		
		Norm:			Zeichnungs-Nr.:	von

1 2 3 4 5 6 7 8 9 10 11 12 13 14