


3.5 MM AUX ADAPTER CABLE, STEREO

Splits the audio signal of a device into 2 separate signals – over many years. The reason: a strong plug, gold-plated connectors and a flexible double shielded premium cable.

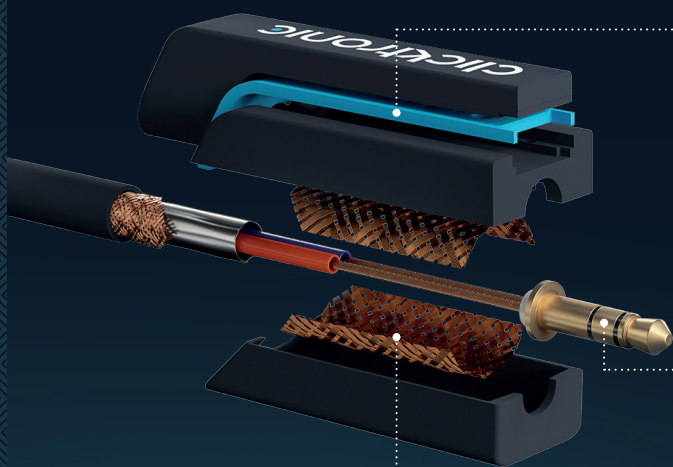

A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic 3.5 mm AUX adapter cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE

To make sure that the connectors remain rust-free, they are coated with 24 carat gold. This prevents them from oxidising. Plus: Unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

DOUBLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the double shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.


OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Brilliant audio – even after years: the inner conductors made from 99.9 % oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic 3.5 mm AUX adapter cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

3.5 MM AUX ADAPTER CABLE, STEREO

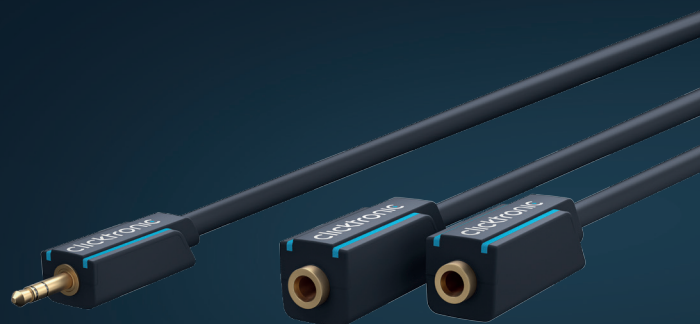

THE CONNECTION FOR MAXIMUM SOUND QUALITY

Enjoy music for two. To connect e.g. 2 headphones or speakers (3.5mm AUX jack) with a multimedia device such as a smartphone or tablet (3.5mm AUX jack).



INPUT



OUTPUT

ALL ADVANTAGES AT A GLANCE

CLEAR SOUND

Transmits analogue stereo signals in maximum quality from 3.5 mm AUX M to 3.5 mm F.

BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

NO FLICKERING

Thanks to double insulation.

FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

RUST-FREE CONNECTOR

Even after years – thanks to a 24 carat gold coating.

3.5 MM AUX ADAPTER CABLE, STEREO

SIGNAL TRANSMISSION


TRANSMISSION TYPES: analogue audio signals

CAPACITY (pF): 155

MAX. BANDWIDTH (MHz): 10

WAVE IMPEDANCE (Ω): 50


CABLE CROSS-SECTION

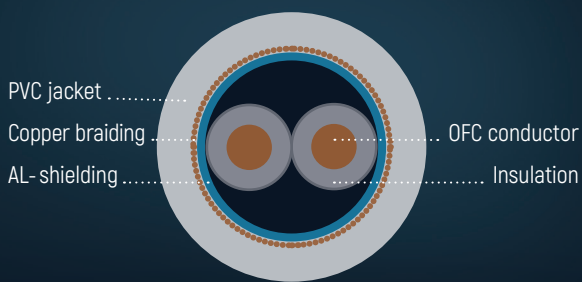

CIRCUIT DIAGRAM

P1 AUX (M)

P2 2×AUX (F)

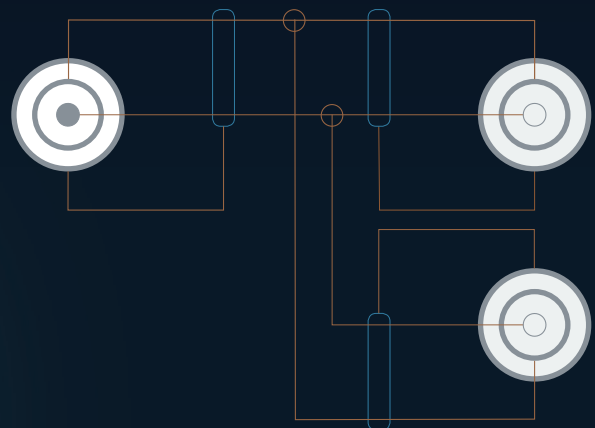

PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
0.1 m	2×9×0.12 mm	27	3.85 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
0.1 m	9.99 €	1/20/80	70491	4040849704918



SUBJECT TO CHANGE. MODEL SIMILAR. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.