


ACTIVE DISPLAYPORT TO HDMI™ ADAPTER CABLE

Smooth images in 4K or WUXGA over 1 to 10 metres and many years. The reason: a strong plug, gold-plated connectors and a flexible triple shielded premium cable.

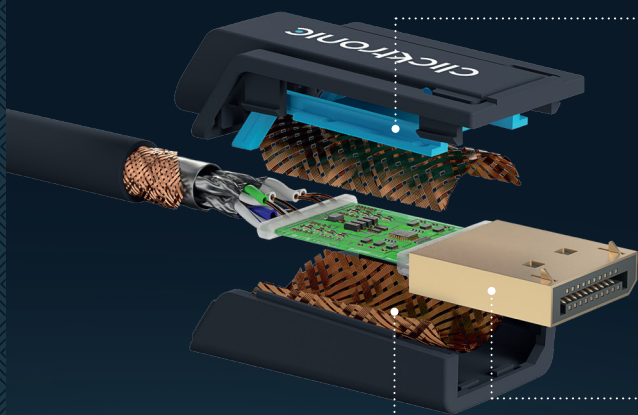

A PLUG THAT PROTECTS AGAINST CABLE BREAKAGE

The plug of the Clicktronic DisplayPort to HDMI™ adapter cable consists of three ABS and PVC parts, making it both flexible and robust: if you, for instance, pull the cable with a jerk, it absorbs some of the energy and protects the inner conductor.

GOLD-PLATED CONNECTORS TO ENSURE A LONG SERVICE LIFE


To make sure that the connectors remain rust-free, they are coated with 24 carat gold. This prevents them from oxidising. Plus: Unlike many materials, gold is excellent at transmitting signals – for resistance-free transmission, completely without any interruptions.

TRIPLE SHIELDED TO AVOID FLICKERING

No flickering, even if several cables run in parallel or the smartphone is lying right next to the cable: the triple shielding consisting of aluminium foil and copper braiding intercepts interfering signals. Even with stronger electromagnetic fields.

OFC INNER CONDUCTORS FOR BRILLIANT SIGNAL QUALITY

Pin-sharp images, brilliant audio – even after years: the inner conductors made from 99.9% oxygen-free copper (OFC) are designed not to come into contact with oxygen. This means that they do not oxidise and they transmit signals excellently, just like on the very first day.

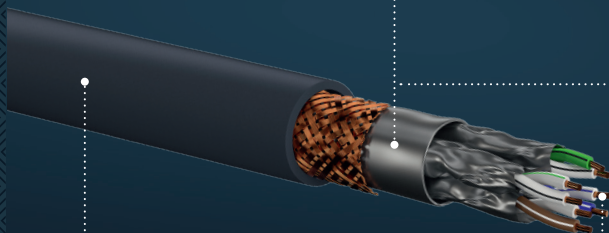

A FLEXIBLE AND ROBUST PVC JACKET

The robust PVC jacket protects the Clicktronic DisplayPort to HDMI™ adapter cable and keeps it flexible enough to bend around any corner – no matter how long it has spent in one position. The reason: the PVC does not absorb water, even in humid conditions. This means that the cable does not become porous.

SUBJECT TO CHANGE. MODEL SIMILAR. HDMI™, THE HDMI™ LOGO AND HIGH-DEFINITION MULTIMEDIA INTERFACE ARE TRADEMARKS OR REGISTERED TRADEMARKS OF HDMI LICENSING LLC IN THE USA AND OTHER COUNTRIES. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.

ACTIVE DISPLAYPORT TO HDMI™ ADAPTER CABLE

HIGH RESOLUTION OVER UP TO 10 METRES

Smooth streaming, presenting and gameplay: The Clicktronic DisplayPort to HDMI™ adapter cable allows you to transmit video and audio signals from a gaming PC or notebook to a HD TV or screen – over 1 to 10 metres and with a resolution of up to 4K (3840 × 2160 px) at 60 Hz or WUXGA (1920 × 1200 px) at 60 Hz.



WITH INTEGRATED SIGNAL AMPLIFIER


The cable transmits the signals via the integrated signal amplifier without data loss, even over long distances. Important: this means it has a signal direction. Connect it so that the printed triangle points from the transmitter to the receiver, e.g. from a laptop ► to a ► screen

SECURE HOLD, OPTIMAL SIGNAL

The plug locks automatically. This means it sits securely in the socket, the connection between all of the contacts is maintained perfectly and the transmission functions optimally – even when used with movable monitors. To disconnect the cable, simply press the unlocking mechanism on the plug.



INPUT

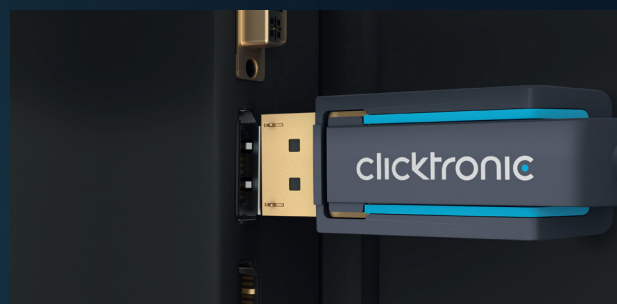

OUTPUT

ALL ADVANTAGES AT A GLANCE

HIGH RESOLUTION

From up to 4K (3840 × 2160 px) at 60 Hz or WUXGA (1920 × 1200 px) at 60 Hz.

SECURE HOLD

Thanks to the mechanical locking with an unlocking mechanism.

NO FLICKERING

Thanks to triple insulation consisting of aluminium foil and copper braiding.

ACTIVE SIGNAL AMPLIFIER

For an optimal signal without data loss. IMPORTANT: The cable only transfers in one direction.

BRILLIANT SIGNAL QUALITY

No oxidation thanks to an inner conductor made from 99.9% oxygen-free copper (OFC).

FLEXIBLE AND ROBUST CABLE

Thanks to the PVC jacket, which can be bent optimally even after years.

STRONG PLUG

PVC and ABS ensure maximum flexibility in the event of a jerk on the cable.

RUST-FREE CONNECTOR


Even after years – thanks to a 24 carat gold coating.

ACTIVE DISPLAYPORT TO HDMI™ ADAPTER CABLE

SIGNAL TRANSMISSION

TRANSMISSION TYPES: digital audio and video signals
 SIGNAL DIRECTION: DP to HDMI™
 MAX. TRANSMISSION RATE (Gbit/s): 21.6 for all (up to 10 m)
 WAVE IMPEDANCE (Ω): 100


CABLE CROSS-SECTION

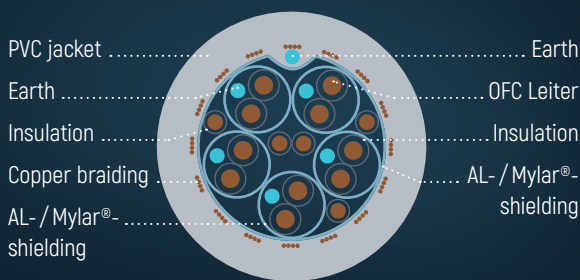

SUPPORTED FORMATS

AUDIO STANDARDS	Dolby Digital / Plus, Dolby True HD, DTS-HD Master Audio™, DVD-Audio, SA-CD
OTHER STANDARDS	3D, HDCP 2.2, DRM, E-DDC, E-EDID, 4K (2160i/p), Full HD (1080i/p), HD ready (720i/p), SDTV (480i/p)
COLOUR SPACES	16 / 24 bit RGB / YUV, Deep Color, x.v.Color™

CIRCUIT DIAGRAM

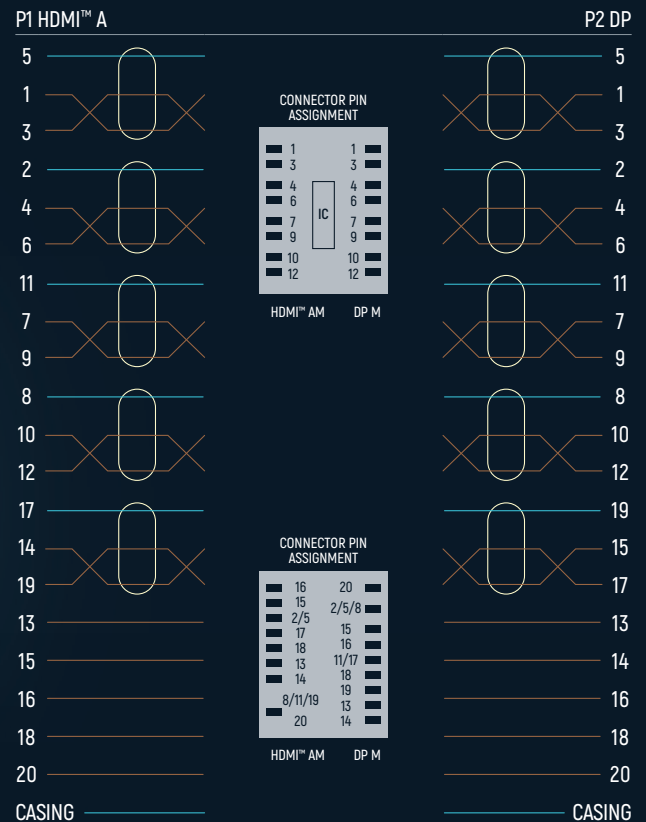

PRODUCT DATA

CABLE LENGTH	Ø INNER CONDUCTOR	AWG	Ø OUTER JACKET
1 – 5 m	1×0.32 mm + 1×0.25 mm	28 + 30	7.3 mm
10 m	1×0.40 mm + 1×0.32 mm	26 + 28	8.2 mm

CABLE LENGTH	RRP	Packaged unit	SKU	EAN
1.0 m	29.99 €	1 / 20 / 40	44923	4040849449239
2.0 m	34.99 €	1 / 15 / 30	44924	4040849449246
3.0 m	39.99 €	1 / 12 / 24	44925	4040849449253
5.0 m	49.99 €	1 / 10 / 20	44926	4040849449260
10.0 m	89.99 €	1 / 8 / 16	44927	4040849449277



SUBJECT TO CHANGE. MODEL SIMILAR. HDMI™, THE HDMI™ LOGO AND HIGH-DEFINITION MULTIMEDIA INTERFACE ARE TRADEMARKS OR REGISTERED TRADEMARKS OF HDMI LICENSING LLC IN THE USA AND OTHER COUNTRIES. ALL BRAND NAMES ARE REGISTERED TRADEMARKS OF THEIR RESPECTIVE OWNERS.