

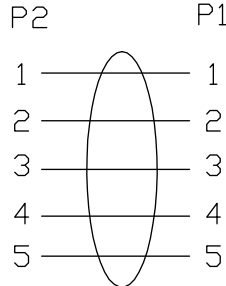


Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)
95129	USB AB 025 LC HiSpeed 2.0 SCHWARZ 0.25m	250 mm
93596	USB AB 180 LC HiSpeed 2.0 SCHWARZ 1.8m	1800 mm
93597	USB AB 300 LC HiSpeed 2.0 SCHWARZ 3m	3000 mm
93598	USB AB 500 LC HiSpeed 2.0 SCHWARZ 5m	5000 mm
65596	USB AB 180 LC HiSpeed 2.0 SCHW. 1.8m SB	1800 mm
61597	USB AB 300 LC HiSpeed 2.0 SCHWARZ 3mSB	3000 mm
61598	USB AB 500 LC HiSpeed 2.0 SCHWARZ 5m SB	5000 mm

Anschlussdiagramm / Wiring diagram

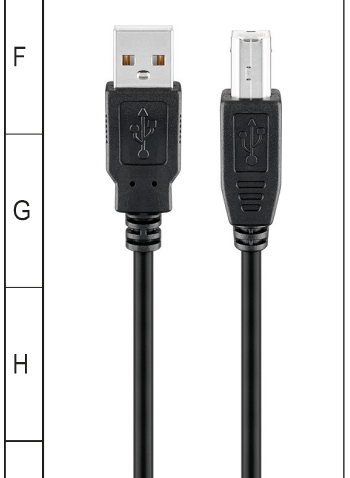

Aderquerschnitt / Wire cross section



**USB 2.0 Hi-Speed Kabel**

- passend für viele Peripheriegeräte wie Drucker oder Scanner
- USB 2.0 Kabel zum Synchronisieren und Laden
- Hi-Speed Datenübertragungen bis 480 Mbit/s

Anschlüsse: USB 2.0-Stecker (Typ A),  
 USB 2.0-Stecker (Typ B)  
 Kabeltyp: Rundkabel  
 Material: PVC 45P  
 Kabel AD: 4 mm  
 AWG: 30  
 Innenleiter: AWG 28 x 4C / 7x0,12BC + AL +  
 32 x 0,1CCS Geflecht

**USB 2.0 Hi-Speed cable**

- suitable for many peripheral devices such as printers or scanners
- USB 2.0 cable for synching and charging
- Hi-speed data transmission up to 480 Mbit/s

Connectors: USB 2.0 male (type A),  
 USB 2.0 male (type B)  
 Cable type: round cable  
 Material: PVC 45P  
 Cable OD: 4 mm  
 AWG: 30  
 Inner conductor: AWG 28 x 4C / 7x0,12BC + AL +  
 32 x 0,1CCS braid

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	28.06.2021	aw	1/1
		gepr.:	28.06.2021	aw	
		Norm:			von
Änderungen vorbehalten / Subject to change					

USB AB XXX LC HiSpeed  
 2.0 SCHWARZ XXXm



Zeichnungs-Nr.: