
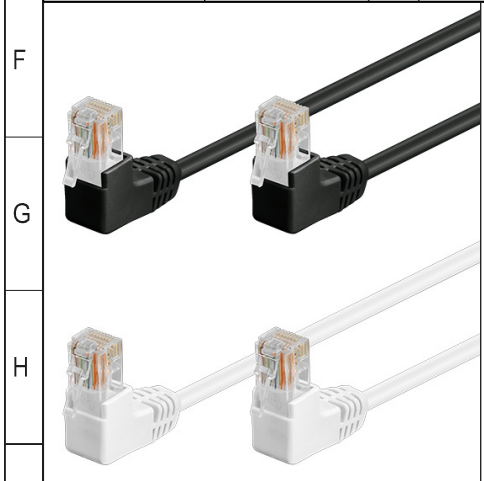
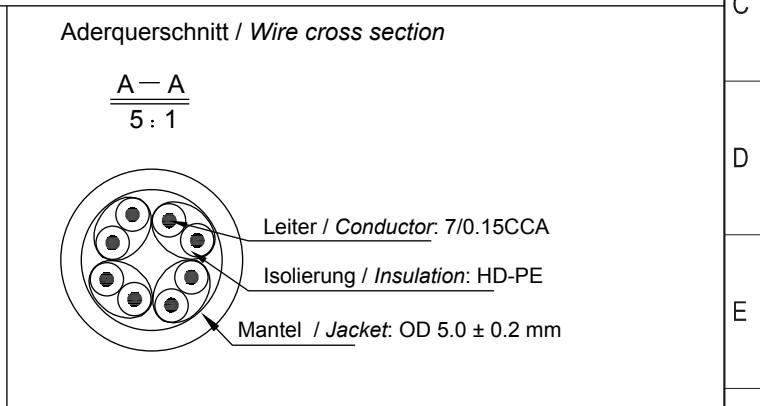


Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Farbe / color
96084	CAT 5-0025 U/UTP (2x90°) SCHWARZ 0.25m	250 ± 20 mm	schwarz / black
96085	CAT 5-0050 U/UTP (2x90°) SCHWARZ 0.50m	500 ± 20 mm	
96086	CAT 5-0100 U/UTP (2x90°) SCHWARZ 1m	1000 ± 20 mm	
96087	CAT 5-0200 U/UTP (2x90°) SCHWARZ 2m	2000 ± 40 mm	
96088	CAT 5-0300 U/UTP (2x90°) SCHWARZ 3m	3000 ± 50 mm	
96089	CAT 5-0500 U/UTP (2x90°) SCHWARZ 5m	5000 ± 70 mm	weiß / white
96090	CAT 5-1000 U/UTP (2x90°) SCHWARZ 10m	10000 ± 100 mm	
96068	CAT 5-0025 U/UTP (2x90°) WEISS 0.25m	250 ± 20 mm	
96069	CAT 5-0050 U/UTP (2x90°) WEISS 0.50m	500 ± 20 mm	
96070	CAT 5-0100 U/UTP (2x90°) WEISS 1m	1000 ± 20 mm	
96071	CAT 5-0200 U/UTP (2x90°) WEISS 2m	2000 ± 40 mm	
96072	CAT 5-0300 U/UTP (2x90°) WEISS 3m	3000 ± 50 mm	
96073	CAT 5-0500 U/UTP (2x90°) WEISS 5m	5000 ± 70 mm	
96074	CAT 5-1000 U/UTP (2x90°) WEISS 10m	10000 ± 100 mm	

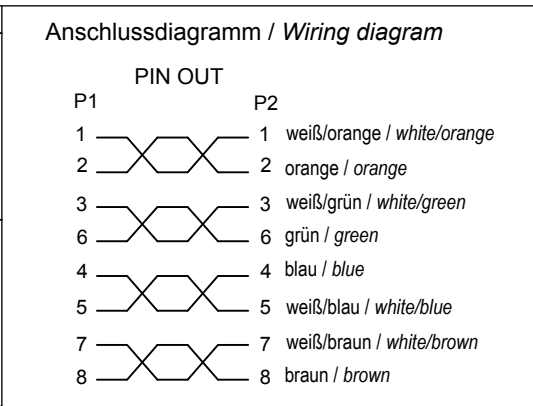

**CAT 5e Patchkabel 2x 90° gewinkelt, U/UTP**

- Slimline-Knickschutzhülse
  - ohne Rastnasenschutz
  - Paarfolge nach EIA/TIA 568B
  - Gigabit (10/100/1000 Mbit) Netzwerk geeignet
- |                         |                                      |
|-------------------------|--------------------------------------|
| - Anschlüsse:           | 2x RJ45-Stecker 90° (8P8C)           |
| - Kontakte:             | vergoldet                            |
| - Material Kabelmantel: | PVC                                  |
| - Schirmungsklasse:     | U/UTP                                |
| - Innenleiter:          | AWG 26/7, 4 x 2 x 7/0.15 ± 0.005 CCA |
| - Spannungsfestigkeit:  | 300 V ---                            |
| - Kontaktwiderstand:    | max. 3 Ω                             |
| - Isolationswiderstand: | 10 MΩ @ 10 ms                        |
| - Impedanz:             | 100 Ω                                |
| - Konformität:          | REACH, RoHS                          |

**CAT 5e patchcable 2x 90° angled, U/UTP**

- slimline strain relief
  - without latch protection
  - pair-sequence acc. to EIA/TIA 568B
  - Gigabit (10/100/1000 Mbit) network suitable
- |                          |                                      |
|--------------------------|--------------------------------------|
| - Connectors:            | 2x RJ45 plug 90° (8P8C)              |
| - Contacts:              | gold-plated                          |
| - Material cable jacket: | PVC                                  |
| - Shielding:             | U/UTP                                |
| - Inner conductor:       | AWG 26/7, 4 x 2 x 7/0.15 ± 0.005 CCA |
| - Withstanding voltage:  | 300 V ---                            |
| - Contact resistance:    | max. 3Ω                              |
| - Insulation resistance: | 10 MΩ @ 10 ms                        |
| - Impedance:             | 100 Ω                                |
| - Conformity:            | REACH, RoHS                          |

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 09.02.2021	aw	CAT 5-XXXX U/UTP (2x90°) XXXX Xm	1/1
		gepr.: 09.02.2021	aw		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	von

